



R250D

STANDARD PORT BALL VALVE

FEMALE x FEMALE

Standard equipment:

Female NPT inlet and outlet, forged brass body, chrome plated ball with teflon seats.




LISTED 757X



APPROVED




Design Certified

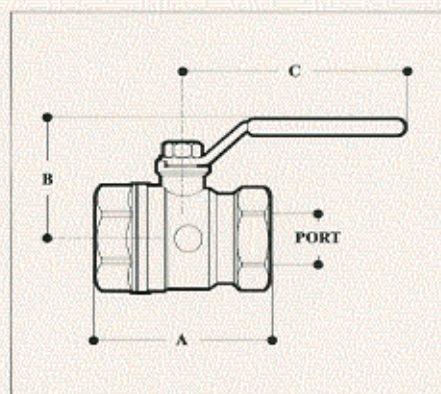

	Port	A	B	C
1/4"	21/64"	1 35/64"	1 1/32"	1 21/32"
3/8"	13/32"	1 25/32"	1 9/32"	3 5/64"
1/2"	1/2"	2 9/64"	1 21/64"	3 5/64"
3/4"	45/64"	2 24/64"	1 51/64"	3 25/32"
1"	57/64"	2 31/32"	1 61/64"	3 25/32"
1 1/4"	1 1/8"	3 5/16"	2 1/8"	3 25/32"
1 1/2"	1 25/64"	3 11/16"	2 11/16"	5 7/16"
2"	1 25/32"	4 7/32"	2 29/32"	5 7/16"
2 1/2"	2 19/64"	5 21/32"	4"	6 25/32"
3"	2 11/16"	6 5/16"	4 5/16"	6 25/32"
4"	3 9/16"	8"	5 11/64"	7 19/64"

SPECIFY THREAD

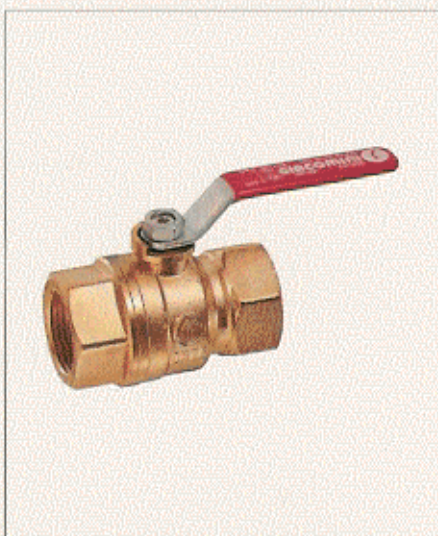

R750D

FULL PORT BALL VALVE

FEMALE x FEMALE

Standard equipment:

Female NPT inlet and outlet, forged brass body, chrome plated ball with teflon seats.




LISTED 757X



APPROVED



Design Certified

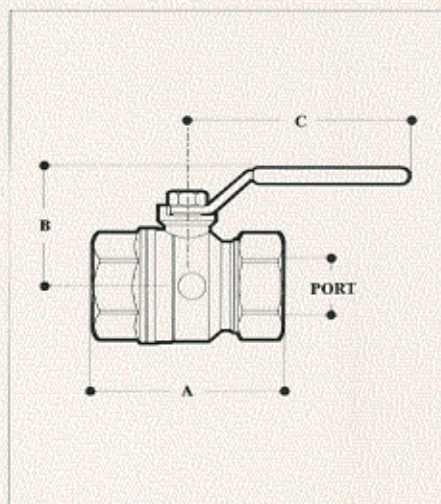

	Port	A	B	C
1/4"	21/64"	1 35/64"	1 1/32"	1 21/32"
3/8"	13/32"	1 61/64"	1 19/64"	3 5/64"
1/2"	19/32"	2 23/64"	1 7/16"	3 5/64"
3/4"	51/64"	2 11/16"	1 7/8"	3 25/32"
1"	1"	3 7/32"	2 1/32"	3 25/32"
1 1/4"	1 17/64"	3 3/4"	2 15/64"	3 25/32"
1 1/2"	1 9/16"	4 3/32"	2 25/32"	5 7/16"
2"	1 13/32"	4 61/64"	3 5/64"	5 7/16"

SPECIFY THREAD